

DIAMOND16

Twin Auger



Standard Features

- Twin Auger/ 21 rpm @ 540 rpm tractor PTO Speed
- Heavy Duty Planetary Gearbox
- 3CR12 Stainless Steel Bin Liners
- Dinamica Generale DG400 Standard Scale + 4 load cells
- PTO Drive shaft, A8
- Anti-Overflow ring
- 315/80 R22.5 Tyres + 90 x 90 Axle, 10 Stud

Optional Extras

- Dinamica Generale DG500/DG600 Smart Scale
- Two Speed Gearbox
- Stationary Option



Specifications

Cubic meter:	16m³
Weight Empty:	6700kg
Maximum Load: (Dependent on the density of the ration)	6000kg
Recommended Tractor Size with Hydraulics:	90kW

Material

Side wall thickness: (6mm Mild Steel + 1.5mm Stainless Steel)	7.5mm
Floor thickness:	20mm



Auger

Cutting Blades (13 per auger):	26
Serrated Ninja Blades (5 per auger):	10
Pickup Flight Width:	840mm
Flight thickness Middle & Top Flight + S/Steel Roundbar:	12mm
Flight thickness Bottom Flight + S/Steel Roundbar:	16mm

Auger Optional Extras

- Stainless Steel Liners
- Auger Magnet
- Bale Breakers

Dimensions

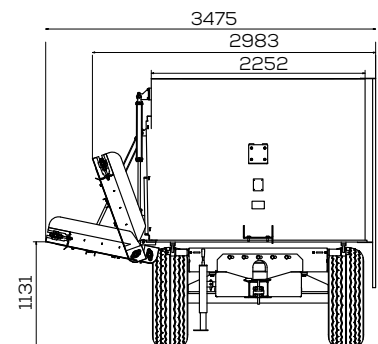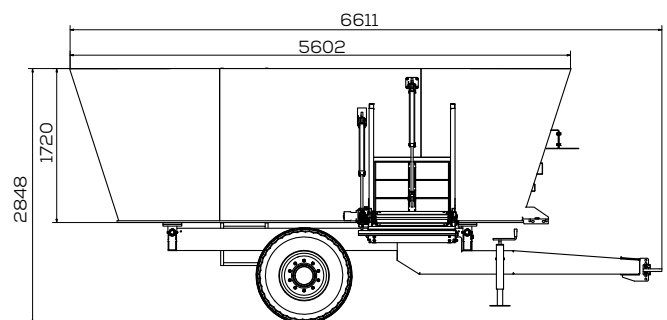

Unleash the
power of precision

